

AngleStar® DP-45 Digital Protractor



- Digital display of angle in degrees
- Battery powered
- Alternate reference (floating zero)
- Display 'Hold' function
- High impact plastic frame
- Soft carrying case



DESCRIPTION

The **AngleStar® DP-45 Digital Protractor** is a handheld, portable angle measurement instrument. Consisting of a rugged electronic sensor, custom circuitry and liquid crystal display, this easy-to-use device provides instant digital display of the angle, eliminating the interpretation errors associated with bubble levels and mechanical protractors.

The frame of the DP-45 is made from a high impact plastic with a 'V' groove profile, making it ideal for measuring both flat and curved surfaces. The 'Alternate Reference' function allows the DP-45 to be 'zeroed' at any angle within the measurement range, enabling the measurement of compound angles. Other features include display hold, low battery warning and over-range indication.

Also see our other models, **AngleStar® Protractor System (APS)** (handheld digital protractor), **AccuStar® Electronic Clinometer** (4 standard input/output configurations), and **AccuStar® IP-66** (2-wire loop powered angle transmitter).

Measurement Specialties, Inc. (NASDAQ MEAS) offers many other types of sensors. Data sheets can be downloaded from our web site at: <http://www.meas-spec.com/datasheets.aspx>

MEAS acquired *Schaevitz Sensors* and the **Schaevitz®** trademark in 2000.

FEATURES

- Easy to read LCD digital display
- Alternate reference (floating zero)
- 100 hour battery life
- 0° to +65°F operating range

APPLICATIONS

- Driveshaft maintenance
- Antenna position
- Race cars
- Machine tooling

AngleStar® DP-45 Digital Protractor

PERFORMANCE SPECIFICATIONS



ELECTRICAL	
Range	±45.0°
Resolution	±0.1°
Linearity	
0 to 10°	±0.1°
10° to 45°	±1.5% of reading
Repeatability	±0.1°
Cross axis error	<1% up to 45° cross axis angle
Voltage supply	9 volt battery
Battery life	100 hours (approx.)
ENVIRONMENTAL/MECHANICAL	
Temperature range	
Operating	0 to +65°C (32 to +149°F)
Storage	-40° to +65°C (-40 to +149°F)
Weight	12.3 ounces (345 grams)

Notes:

All values are nominal unless otherwise noted!

DIMENSIONS AND FUNCTIONS

- ON/OFF** The instrument is powered by a single push of the ON/OFF button. Power is removed by a second push of the same button or after a 10 minute time out period.
- HOLD** The display reading on the LCD is retained and flashes when the HOLD button is depressed. Push again to release hold feature.
- ALT REF** (Floating Zero) Alternate reference allows you to zero the digital readout anywhere within its range for a quick and accurate measurement of deviations from a reference surface.
- LO BAT LO BAT** is displayed on the LCD when the battery voltage drops below 7 volts. The battery should be replaced when this condition exits. Low battery voltage may affect accuracy.
- MINUS SIGN** The minus sign (-) indicates an angle in the counterclockwise direction from zero. Absence of the minus sign indicates an angle clockwise from zero.
- OVER RANGE** When the instrument is used at an angle that exceeds its measurement range (±55° from level, null) no angular reading will appear on the LCD and OVER RANGE will flash.
- ALT REF** Depressing the ALT REF button will zero the display reading to a new reference and "ALT REF" will be displayed on the LCD. A second push of the ALT REF will return the instrument to normal, or gravity referenced mode.

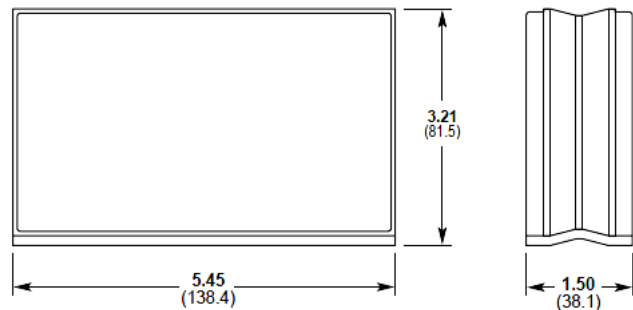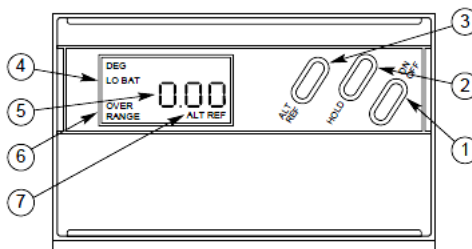

Dimensions are in inches (mm)

AngleStar® DP-45 Digital Protractor

ORDERING INFORMATION

MODEL	MEASUREMENT RANGE	PART NUMBER
DP-45	±45°	02475-01

TECHNICAL CONTACT INFORMATION

NORTH AMERICA	EUROPE	ASIA
Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 United States Phone: +1-800-745-8008 Fax: +1-757-766-4297 Email: sales@meas-spec.com Web: www.meas-spec.com	MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: info.de@meas-spec.com Web: www.meas-spec.com	Measurement Specialties China Ltd. No. 26, Langshan Road High-tech Park (North) Nanshan District, Shenzhen 518057 China Phone: +86-755-33305088 Fax: +86-755-33305099 Email: info.cn@meas-spec.com Web: www.meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.