

E Series – Economy Series AC LVDT



- Economical
- Stroke ranges from ± 0.1 to ± 2 inch
- AC operation, 50Hz to 10kHz
- Magnetically shielded case
- Available with imperial or metric core

DESCRIPTION

The **E Series** of LVDTs is highly economical, satisfying numerous applications in which LVDT performance and reliability are desired, but where budgets are limited. With a linearity of just $\pm 0.5\%$ of full range (E 2000, $\pm 1.0\%$), the E Series is suitable for most applications with moderate operating temperature environments. Housed in magnetic stainless steel for protection against electromagnetic and electrostatic interference, the E Series rugged construction is capable of resisting the shock and vibration of most industrial applications.

Like in most of our LVDTs, the E Series windings are vacuum impregnated with a specially formulated, high temperature, flexible resin, and the coil assembly is potted inside its housing with a two-component epoxy. This provides excellent protection against hostile environments such as high humidity, vibration and shock.

Measurement Specialties, Inc. (NASDAQ MEAS) offers many other types of sensors and signal conditioners. Data sheets can be downloaded from our web site at: <http://www.meas-spec.com/datasheets.aspx>

MEAS acquired Schaevitz Sensors and the **Schaevitz**® trademark in 2000.

FEATURES

- Customary LVDT performance
- AISI 400 Series stainless steel case
- Imperial or metric core

APPLICATIONS

- General industrial
- Moderate operating temperature environments
- Cost sensitive applications

PERFORMANCE SPECIFICATIONS

ELECTRICAL SPECIFICATIONS						
Parameter	E 100	E 200	E 300	E 500	E 1000	E 2000
Stroke range	± 0.1 [± 2.54]	± 0.2 [± 5.08]	± 0.3 [± 7.62]	± 0.5 [± 12.7]	± 1 [± 25.4]	± 2 [± 50.8]
Sensitivity, V/V/inch	2.40	1.57	1.20	0.68	0.76	0.46
Sensitivity, mV/V/mm	94.5	61.8	47.2	26.8	29.9	18.1
Output at stroke ends (*)	240mV/V	314mV/V	360mV/V	340mV/V	760mV/V	920mV/V
Non-linearity (maximum)	$\pm 0.5\%$ of FR	$\pm 0.5\%$ of FR	$\pm 0.5\%$ of FR	$\pm 0.5\%$ of FR	$\pm 0.5\%$ of FR	$\pm 1.0\%$ of FR
Phase shift	-3°	-5°	-8.5°	+6°	+4°	0°
Input impedance (PRI)	660 Ω	970 Ω	960 Ω	408 Ω	525 Ω	585 Ω
Output impedance (SEC)	960 Ω	1010 Ω	1005 Ω	162 Ω	690 Ω	875 Ω
Input voltage & frequency	3 VRMS @ 50Hz to 10kHz, sine wave					
Test input frequency	2.5kHz					
Null voltage (maximum)	1.0% of FSO					

E Series – Economy Series AC LVDT

ENVIRONMENTAL SPECIFICATIONS & MATERIALS

Operating temperature	-65°F to +200°F [-55°C to 95°C]
Shock survival	500 g (11ms half-sine)
Vibration tolerance	20 g up to 2kHz
Housing material	AISI 400 Series stainless steel
Electrical connection	Six lead-wires, 28 AWG, PTFE insulated, 1 foot [0.3m] long

Notes:

All values are nominal unless otherwise noted

Electrical specifications are for the test frequency indicated in the table

Dimensions are in inch [mm] unless otherwise noted


(*): Unit for output at stroke ends is millivolt per volt of excitation (input voltage)

FR: Full Range is the stroke range, end to end; FR=2xS for ±S stroke range

FSO (Full Scale Output): Largest absolute value of the outputs measured at the ends of the range


MECHANICAL SPECIFICATIONS

	E 100	E 200	E 300	E 500	E 1000	E 2000
Body length "A"	1.75 [44.5]	2.25 [57.2]	2.77 [70.4]	4.56 [115.8]	7.05 [179.1]	10.57 [268.5]
Core length "B"	1.25 [31.8]	1.48 [37.6]	1.62 [41.2]	3.00 [76.2]	3.80 [96.5]	6.20 [157.5]
Bore diameter "D"	0.236 [6.00]	0.236 [6.00]	0.236 [6.00]	0.220 [5.59]	0.220 [5.59]	0.220 [5.59]
Body weight, oz [gram]	1.09 [31]	1.27 [36]	1.59 [45]	1.98 [56]	2.43 [69]	4.48 [127]
Core weight, oz [gram]	0.12 [3.4]	0.13 [3.8]	0.17 [4.8]	0.30 [8.4]	0.39 [11]	0.60 [17]

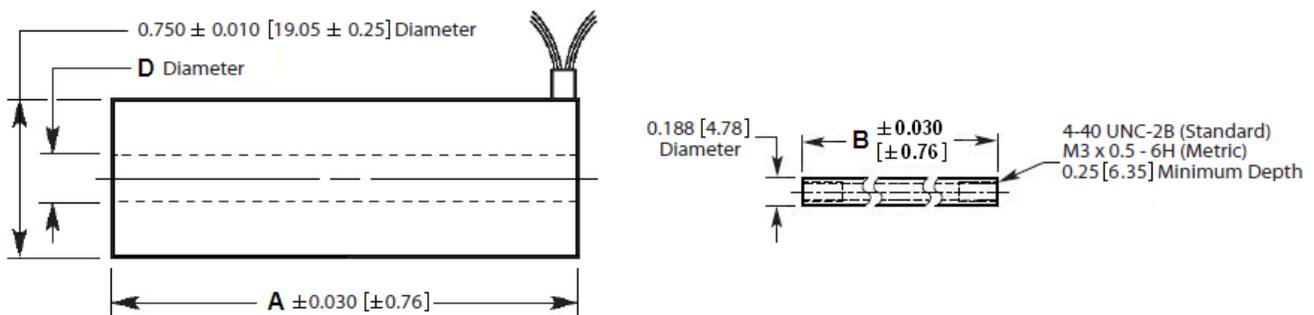

Dimensions are in inch [mm]

WIRING INFORMATION

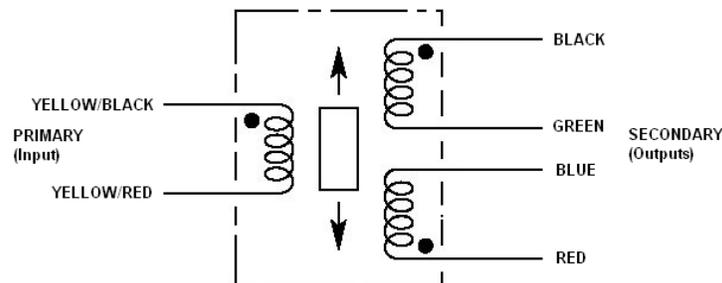

Connect Blue to Green for differential output

E Series – Economy Series AC LVDT

ORDERING INFORMATION

Description	Model	Part Number
±0.1 inch LVDT	E 100	02560541-000
±0.2 inch LVDT	E 200	02560542-000
±0.3 inch LVDT	E 300	02560543-000
±0.5 inch LVDT	E 500	02560544-000
±1 inch LVDT	E 1000	02560545-000
±2 inch LVDT	E 2000	02560546-000
Metric core option (M3x0.5-6H threads)	All	XXXXXXXX-006

ACCESSORIES	
Core connecting rod, 6 inches long, 4-40 threads	05282946-006
Core connecting rod, 12 inches long, 4-40 threads	05282946-012
Core connecting rod, 24 inches long, 4-40 threads	05282946-024
Core connecting rod, 36 inches long, 4-40 threads	05282946-036
Core connecting rod, 6 inches long, M3x0.5 metric threads	05282977-006
Core connecting rod, 12 inches long, M3x0.5 metric threads	05282977-012
Mounting block	04560950-000

Refer to our "[Accessories for LVDTs](#)" data sheet for our LVDT signal conditioning instrumentation and other accessories.

TECHNICAL CONTACT INFORMATION

NORTH AMERICA	EUROPE	ASIA
Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 United States Phone: +1-800-745-8008 Fax: +1-757-766-4297 Email: sales@meas-spec.com Web: www.meas-spec.com	MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: info.de@meas-spec.com Web: www.meas-spec.com	Measurement Specialties China Ltd. No. 26, Langshan Road High-tech Park (North) Nanshan District, Shenzhen 518057 China Phone: +86-755-33305088 Fax: +86-755-33305099 Email: info.cn@meas-spec.com Web: www.meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.