

# R120LC – DC Operated Low Cost RVIT



- Low cost
- 5VDC supply voltage
- 0 to 120 degree sensing range
- Non-contact design
- ¼ inch shaft diameter
- Ratiometric output
- No wear potentiometer replacement
- Light weight

## DESCRIPTION

The **R120LC** RVIT (Rotary Variable Inductance Transducer) is a cost efficient, DC operated non-contact angular position sensor. It provides a smooth 0.5 to 4.5VDC output, ratiometric to the supply voltage and proportional to angular position over the 120 degree sensing range. The R120LC utilizes non-contacting, differential inductive technology, and does not suffer the wear problems experienced by potentiometers.

The R120LC proprietary design utilizes a set of four printed circuit coils and a light-weight conductive spoiler to achieve superior performance with a low moment of inertia. During operation, the light weight spoiler rotates with the transducer shaft, differentially altering the inductance of the printed circuit planar coils. The resulting unbalance is precisely measured using a patented autoplex circuit. This signal is then converted to a linear DC output voltage proportional to the angle of the rotor shaft. The digital circuit provides resistance to environmental disturbances such as EMI and RFI, and is ideally suited to the most rigorous industrial applications.

Calibrated over the full 120 degree sensing range, the R120LC offers exceptional performance at a cost effective price. It also features a wide operating temperature range, infinite resolution, and an extremely long rotational cycle life.

Also see our other DC operated, angular position sensor models, **RVIT-15 Series** (single ended DC operation, voltage or current output), **R60D** (bipolar DC operation), and the **R30D** (DC operated RVDT).

Measurement Specialties, Inc. (NASDAQ MEAS) offers many other types of sensors and signal conditioners. Data sheets can be downloaded from our web site at: <http://www.meas-spec.com/datasheets.aspx>

*MEAS acquired Schaevitz Sensors and the **Schaevitz**® trademark in 2000.*

## FEATURES

- Precision ball bearings
- Infinite resolution
- Low moment of inertia
- Long term reliability
- Wide operating temperature range

## APPLICATIONS

- Valve position
- Fly-by-wire joy-stick position feedback
- General aviation stall warning sensor
- Potentiometer replacement

# R120LC – DC Operated Low Cost RVIT

## PERFORMANCE SPECIFICATIONS

| ELECTRICAL SPECIFICATIONS        |  |
|----------------------------------|--|
| Input voltage                    | 5±0.25 VDC   |
| Input current                    | 21mA maximum   |
| Angular range                    | 0 to 120 degree  |
| Non-linearity                    | ±0.5% of FSO   |
| Output at range ends             | +0.5 to +4.5 VDC (ratiometric to input voltage)                              |
| Sensitivity                      | 6.67mV/V/degree (ratiometric to input voltage)                               |
| Temp coefficient of output       | ±0.02% of FSO per °F [0.03% of FSO per °C], over operating temperature range |
| Output current                   | 5mA maximum  |
| Output impedance                 | 1Ω maximum   |
| Non-repeatability and hysteresis | 0.1% of FRO maximum  |
| Frequency response               | 200 HZ @ -3 dB   |

| ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS |   |
|---|---|
| Operating temperature range                 | -13°F to +185°F [-25°C to 85°C]                               |
| Storage temperature range                   | -67°F to +257°F [-55°C to 125°C]                              |
| Mechanical angular range                    | 360 degrees (no stops)  |
| Bearings                                    | ABEC 3 precision  |
| Shaft diameter                              | ¼ inch [6.3mm]  |
| Torque                                      | 0.12 inch.ounce-force [8.6 gram-force.cm]                     |
| Weight                                      | 1.2oz [34gm]  |
| Electrical connection                       | 4 lead wires, 28 AWG , PTFE insulation, 12 inches [30cm] long |


**Notes:**

All values are nominal unless otherwise noted

FSO (Full Scale Output): Largest absolute value of the outputs measured at the ends of the range

FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range


## DIMENSIONS

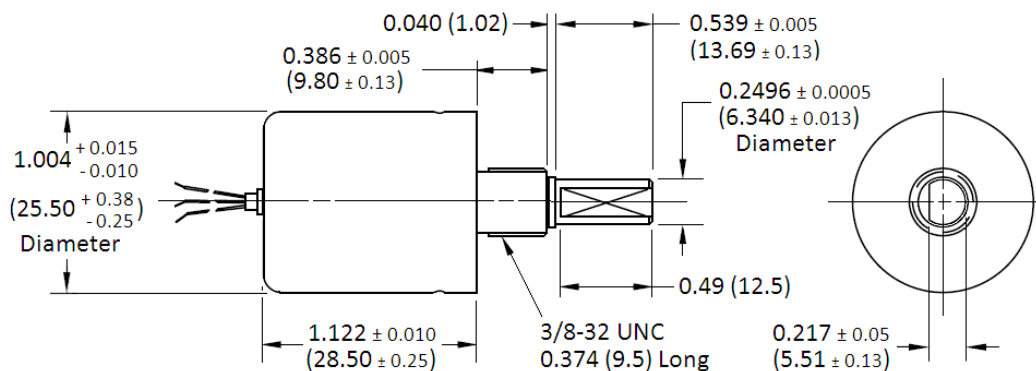

Dimensions are in inch (mm)

# R120LC – DC Operated Low Cost RVIT

## WIRING INFORMATION

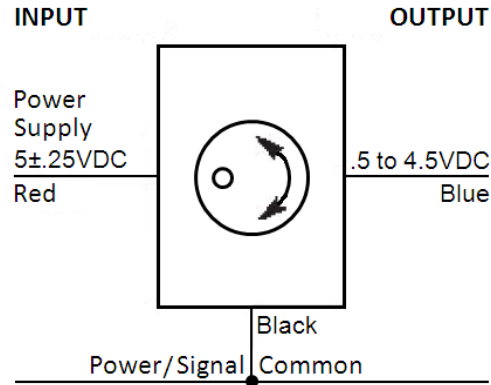

## ORDERING INFORMATION

| Description | Model  | Part Number  |
|-------------|--------|--------------|
| RVIT 0-120° | R120LC | 02183000-000 |

Refer to our [“RVDT and RVIT Accessories”](#) data sheet for other accessories.

## TECHNICAL CONTACT INFORMATION

| NORTH AMERICA   | EUROPE   | ASIA  |
|---|--|---|
| Measurement Specialties, Inc.<br>1000 Lucas Way<br>Hampton, VA 23666<br>United States<br>Phone: +1-800-745-8008<br>Fax: +1-757-766-4297<br>Email: <a href="mailto:sales@meas-spec.com">sales@meas-spec.com</a><br>Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a> | MEAS Deutschland GmbH<br>Hauert 13<br>D-44227 Dortmund<br>Germany<br>Phone: +49-(0)231-9740-0<br>Fax: +49-(0)231-9740-20<br>Email: <a href="mailto:info.de@meas-spec.com">info.de@meas-spec.com</a><br>Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a> | Measurement Specialties China Ltd.<br>No. 26, Langshan Road<br>High-tech Park (North)<br>Nanshan District, Shenzhen 518057<br>China<br>Phone: +86-755-33305088<br>Fax: +86-755-33305099<br>Email: <a href="mailto:info.cn@meas-spec.com">info.cn@meas-spec.com</a><br>Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a> |

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.